

[Home](#) » [dyson](#) » **dyson HJ10 Hushjet Compact Purifier User Manual**

Advertisements

Contents

- 1 dyson HJ10 Hushjet Compact Purifier**
- 2 Specifications**
- 3 Product Usage Instructions**
- 4 Getting started**
- 5 Connecting to the MyDyson™ app**
- 6 Connecting to your smart home device**
- 7 Wi-Fi connectivity**
- 8 Continuous monitoring**
- 9 Information menu**
- 10 Auto purify**
- 11 Set airflow speed**
- 12 Sleep mode**
- 13 Changing your HEPA filter**
- 14 Reset your HEPA filter life**
- 15 Looking after your machine**
- 16 FAQ**
- 17 Documents / Resources**
 - 17.1 References**



dyson HJ10 Hushjet Compact Purifier



Specifications

- Model: Dyson HushJet™ Purifier Compact
- Nozzle: Hushjet nozzle
- Filter: Mesh filter cover, HEPA filter, Carbon filter
- Features: Screen on front, operating buttons below screen, outer cover release button on the side
- Connectivity: Wi-Fi enabled

Product Usage Instructions

- Use both hands to lift the machine from the box by its base.
- Remove all protective packaging, including around the plug and cable.

Advertisements




-
- Plug in the machine and press the Stand-by on/off button to start/stop it.
 - Download the MyDyson™ app from the App Store or Google Play.
 - Open the app and follow the on-screen instructions to create a new account.
 - Ask Alexa to enable the Dyson skill to control your purifier.
 - Control your purifiers with Google or set automation routines.
 - Connect supported Dyson machines to Siri Shortcuts for voice control.
 - To turn Wi-Fi on or off, press and hold the Stand-by on/off button for five seconds.
 - The LCD screen displays air quality, filter levels, and Wi-Fi status information.

Getting started

- Use both hands to lift your machine out of the box, by its base.
- Remove all protective packaging, including around the plug and cable.
- Plug in and press the Stand-by on/off button on your Dyson air purifier to start/stop your machine. It will continue to monitor the air quality.



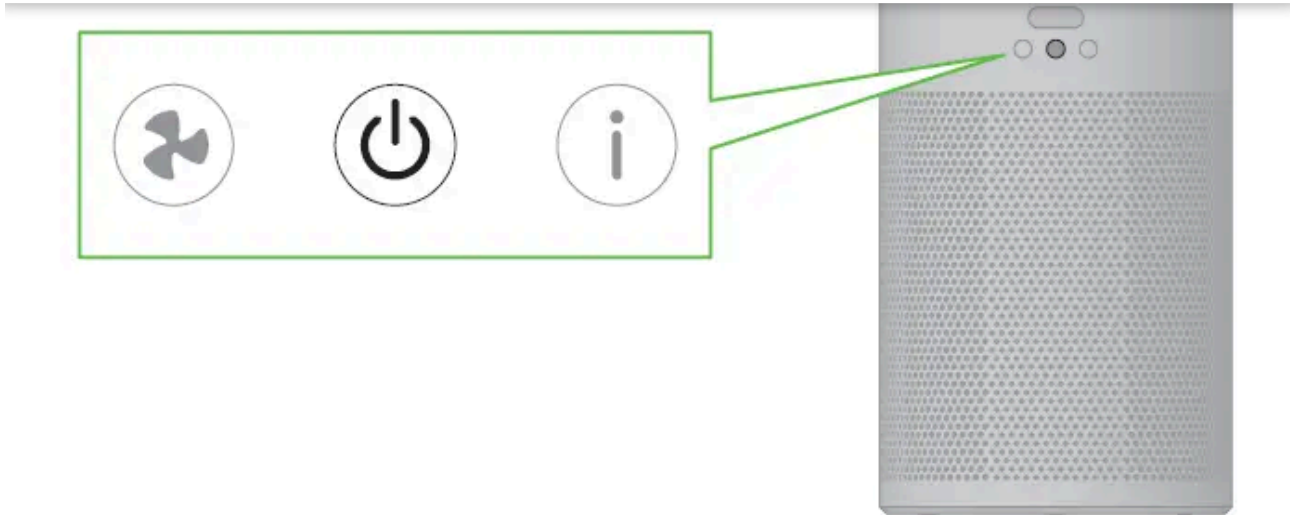

- The Stand-by button is located on the front of your purifier under the LCD screen. It is the centre button and has a Power button icon.

Advertisements

Connecting to the MyDyson™ app

- Take full control with the MyDyson™ app and access step-by-step setup and support, control how and when your Dyson air purifier operates, monitor air quality with visual updates and automatically keep up to date with the latest software updates.
- Download the MyDyson™ app from the App Store or Google Play.
- Open the app and follow the on-screen instructions to create a new account.



[myDyson app icon.](#)

- Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries.
- App Store is a service mark of Apple Inc., registered in the U.S. and other countries.
- Google Play and the Google Play logo are trademarks of Google Inc.

Advertisements



[Download on the App Store.](#)

- The Android robot is reproduced or modified from work created and shared by Google and used according to terms described in the Creative Commons 3.0 Attribution License.



Connecting to your smart home device

Using Amazon Alexa

- Ask Alexa to enable the Dyson skill, to control your Dyson purifier or purifier humidifier. And set a routine that automates how your machine works with other devices in your home.



Works with Amazon Alexa

Using Google Assistant

- Control all of your connected purifiers with Google or set a routine to automate how your machine works with other devices in your home. Just say “Hey Google” to get started.

Advertisements



Using Siri

- Connect your supported Dyson machines to Siri Shortcuts and you'll be able to control them with your voice, on your Apple device.



Siri Shortcuts logo.

Wi-Fi connectivity

- Wi-Fi is turned on by default. To turn the Wi-Fi on or off, press and hold the Stand-by on/off button on your machine for five seconds.
- The LCD screen will indicate the Wi-Fi status.





The Wi-Fi symbol, a dot emanating three arcs.

Continuous monitoring

- Continuous monitoring is turned off by default. You'll need to activate it to start measuring and recording your air quality (AQ) data.
- With Continuous monitoring active, your Dyson air purifier will gather air quality information and display it on the LCD screen and in the MyDyson™ app.

Advertisements

LG MC2146BG
21 L Convection
Microwave...
₹11,082



LG
MJEN326SBW
32 L Scan-To-...
₹24,492



LG
MJEN326SFW
32 L Wi-Fi...
₹26,372



LG US-
Q12CNXE
3 Star 20...
₹30,992
~~₹62,990~~



Manuals+



- To turn it on or off from your machine, press and hold the Stand-by on / off button together with the Info button for five seconds. The LCD screen will indicate the Continuous monitoring status.



The Continuous monitoring status icon will be crossed and greyed out if it is currently disabled.


Information menu

- Press this button to scroll through information monitored by your Dyson HushJet™ Purifier Compact air purifier.
- Information about air quality, filter levels and Wi-Fi status is shown on the LCD screen.






The Info button is located to the right of the Stand-by on/off button, it is labelled with a lower-case i.

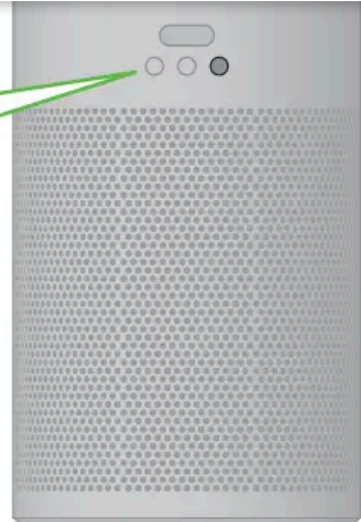

Indoor air quality

- Air quality graph shows the last 12 seconds of data.

The air quality graph on the LCD screen.

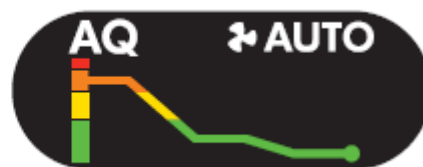

Particulate matter (PM2.5)

- Microscopic particles up to 2.5 microns in size, suspended in the air we breathe. These include smoke, bacteria and allergens.



Particulate matter (PM10)

Advertisements

- Larger microscopic particles up to 10 microns in size, suspended in the air we breathe. These include dust, mould and pollen.

PM10 on the LCD screen.



Filters

- The remaining filter life on the LCD screen indicates when filters need replacing.

Advertisements



Wi-Fi

- The current status of the connection to the Wi-Fi network.

The Wi-Fi status symbol, a dot with three arcs emanating, signal strength is shown by how many of the arcs are illuminated.



Auto purify

- Your air purifier is set to Auto mode by default when first switched on.
- The on-board sensor will intelligently adjust the settings of the machine according to the air quality.
- Air quality: Your machine will pause when the target air quality has been reached, switching on again when the air quality levels drop.
- Airflow speed: The airflow speed will increase to its maximum until the target air quality has been reached.





The LCD screen will show
AUTO when in Auto mode.

Set airflow speed

- Increase or decrease the airflow speed from your machine or on the MyDyson™ app.

Advertisements



Note: Airflow speed selection from 1 to 10 from the MyDyson™ app.



Press the fan button twice to set the airflow to Low. Your machine's LCD screen will show 1 bar illuminated.



Press the fan button 3 times to set the airflow to Medium. Your machine's LCD screen will show 2 bars illuminated.



Medium



Press the fan button 4 times to set the airflow to High. Your machine's LCD screen will show all 3 bars illuminated.



High



Sleep mode

- If your machine is not connected to the MyDyson™ app and doesn't have

- In Sleep mode, your Dyson air purifier will continue to clean the air quietly, in a lower air flow speed with its LCD screen dimmed.
- Press the Sleep timer button from the MyDyson™ app to scroll through the timer options.

Sleep mode is active when you see a crescent moon icon on the LCD screen.



Low



- To activate Sleep mode, press the Fan button on your machine and then wait for two seconds and the icon will appear.

icon on the LCD screen.



- In Sleep mode, your Dyson air purifier will continue to clean the air quietly, in a lower air flow speed with its LCD screen dimmed.
- Press the Sleep timer button from the MyDyson™ app to scroll through the timer options.
- To activate Sleep mode, press the Fan button on your machine and then wait for two seconds and the icon will appear.
- When activating Sleep mode, the air flow setting will default to speed 4.
- The screen will then dim on the machine.
- To deactivate Sleep mode, press the Fan button on your machine and then wait for two seconds. The fan speed will then revert to the lowest speed setting.






Changing your HEPA filter

- The MyDyson™ app and the LCD screen will alert you when your filter life is running low. Replacement filters are available to buy on www.dyson.com
- Switch off and unplug your Dyson air purifier.

Advertisements




- Remove the Carbon filter and put it aside.
- Dispose of the HEPA filter.

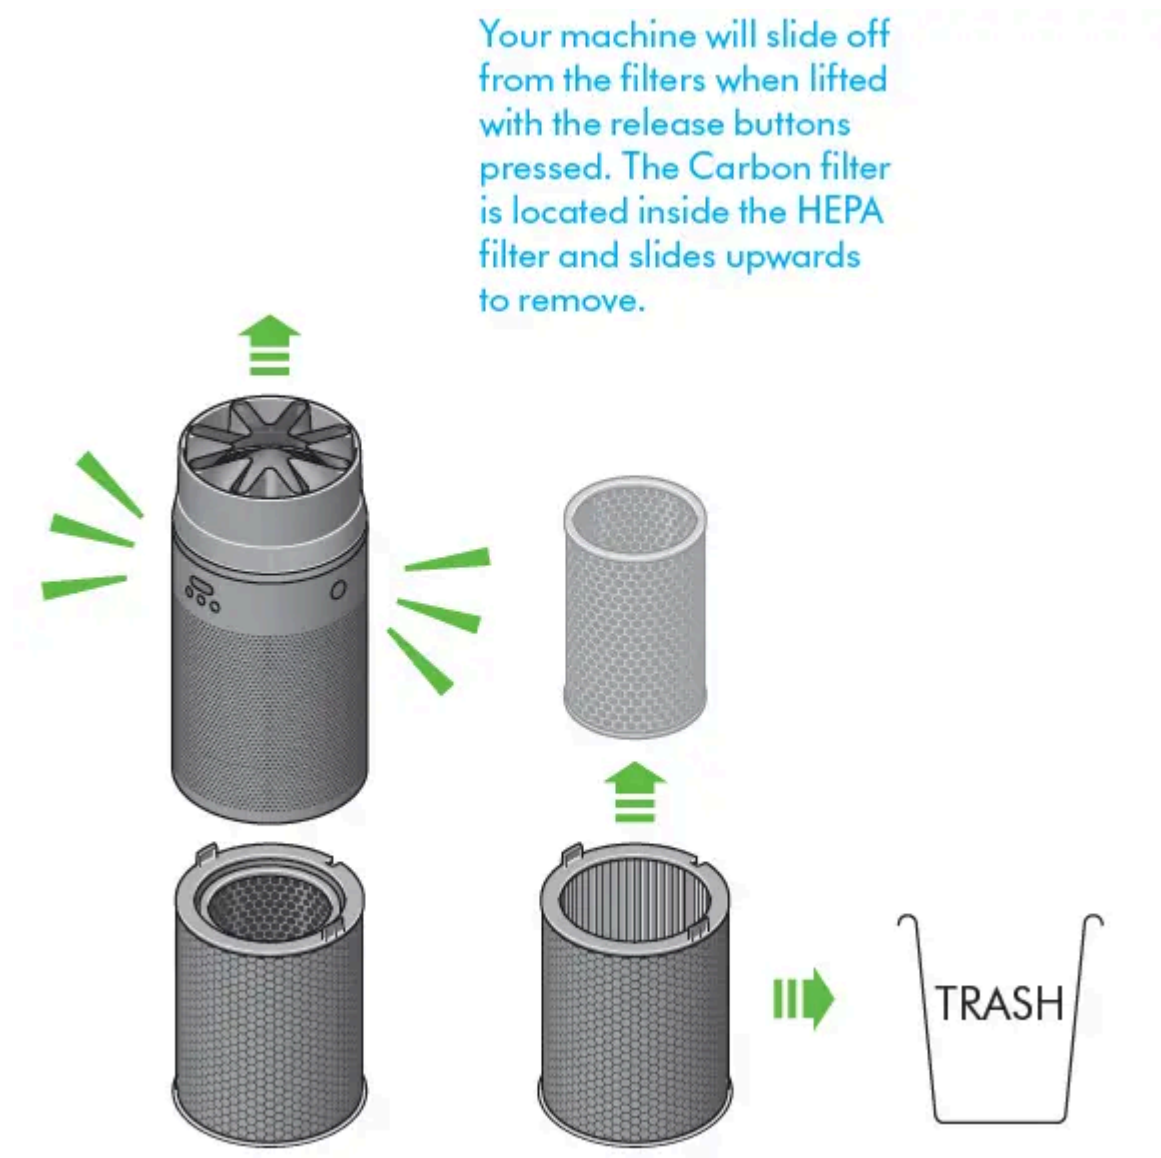

Install a new HEPA filter

- Remove your replacement filter from any packaging. Place the carbon filter inside the new HEPA filter.



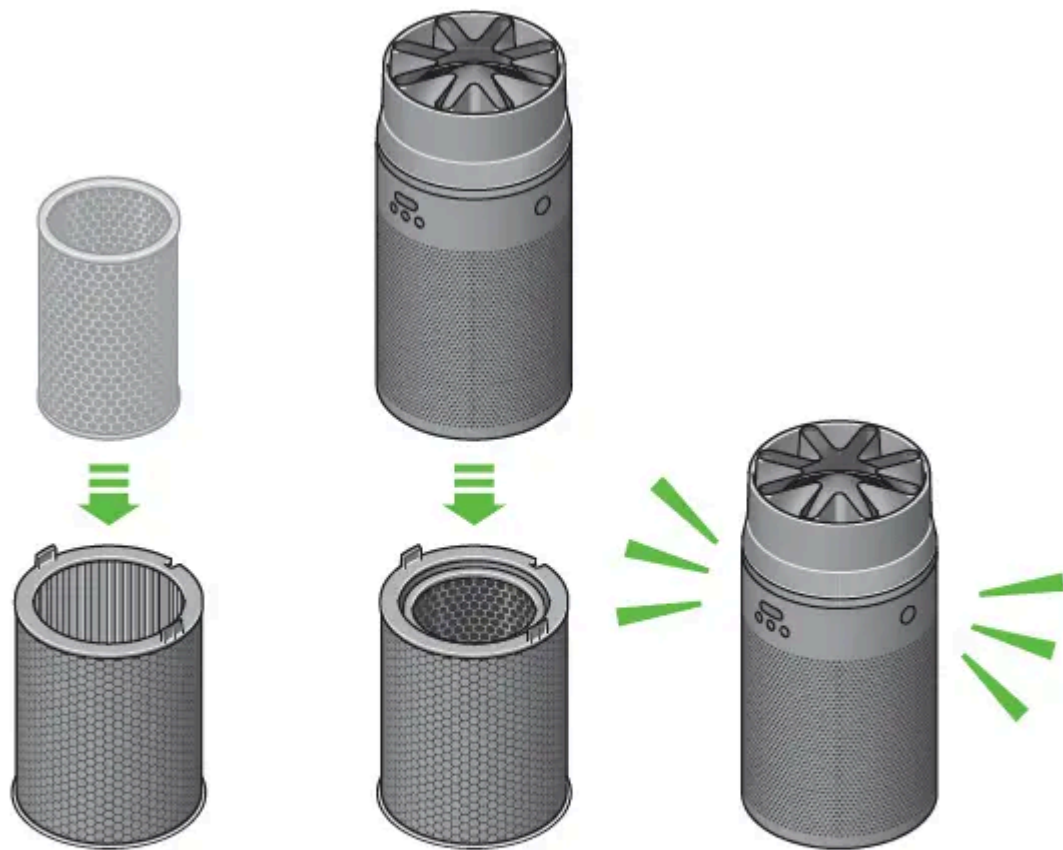

The Carbon filter slides down into the centre of your new HEPA filter. Then your machine slides over the filters and clicks into place.

Reset your HEPA filter life

- It's important to reset the filter life after replacing your filter.
- Press and hold the Fan button.
- The LCD screen on your machine will count down from five, then a tick will appear on the screen.
- The filter life has been reset, and your machine is ready to use.



Changing your Carbon filter

- The MyDyson™ app and the LCD screen will alert you when your filter life is running low. Replacement filters are available to buy on www.dyson.com
- Switch off and unplug your Dyson air purifier.

Remove the filter

- The Carbon filter is located inside the HEPA filter. Press the filter release buttons on the side of your machine and lift your machine upwards.
- Remove the Carbon filter from the inside of the HEPA filter
- Dispose of the Carbon filter.






Install a new Carbon filter

- Remove your replacement filter from any packaging. Place your new Carbon filter inside the HEPA filter.
- Place your machine over the filter. Ensure the slot on the HEPA filter aligns with the cable cover on your machine. Slide your machine down until it clicks securely into position.
- Plug in, switch on and then reset your filter life.

Advertisements



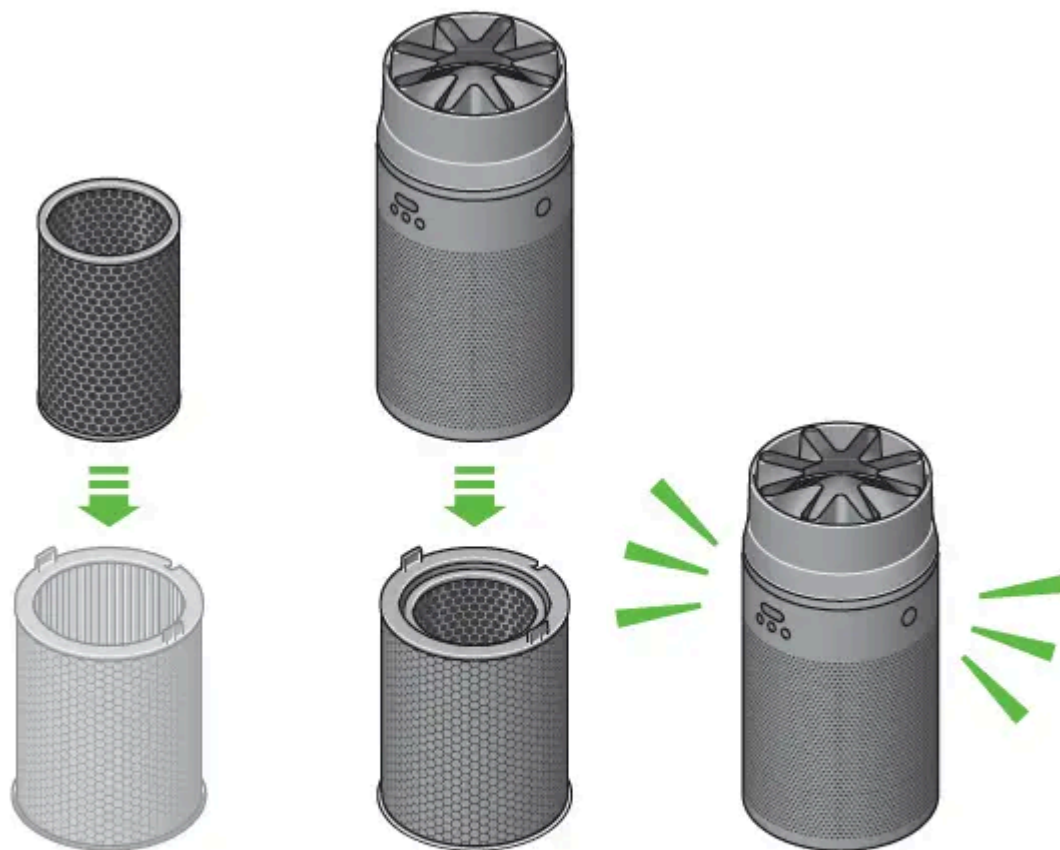


Your new Carbon filter slides down into the centre of the HEPA filter. Then your machine slides over the filters and clicks into place.

Reset your Carbon filter life

- It's important to reset the filter life after replacing your filter.
- Press and hold the Info button.
- The LCD screen on your machine will count down from five, then a tick will appear on the screen.
- The filter life has been reset, and your machine is ready to use.



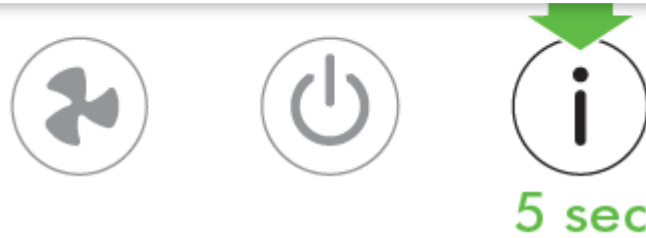

Looking after your machine

- To always get the best performance from your Dyson air purifier, it's important to regularly clean it and check for blockages.
- Always remember to switch off and unplug your Dyson air purifier before proceeding with any cleaning.

Cleaning your machine


- If your machine is dusty, wipe with a damp, lint-free cloth.
- Check the sensor inlets located around the back of your Dyson air purifier for dust and debris.
- Look for dust and debris in the machine.
- Use a soft brush to remove dust and debris.
- Don't use detergents or polishes to clean your machine.

Advertisements





The Dyson HushJet™
Purifier Compact.

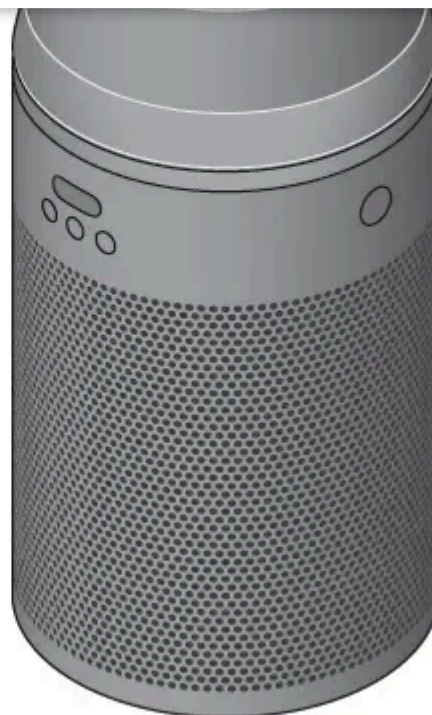


Remove the nozzle



Use a soft brush to remove dust and debris.

- The nozzle can be washed. Make sure it is fully dried before reinstalling to your machine.



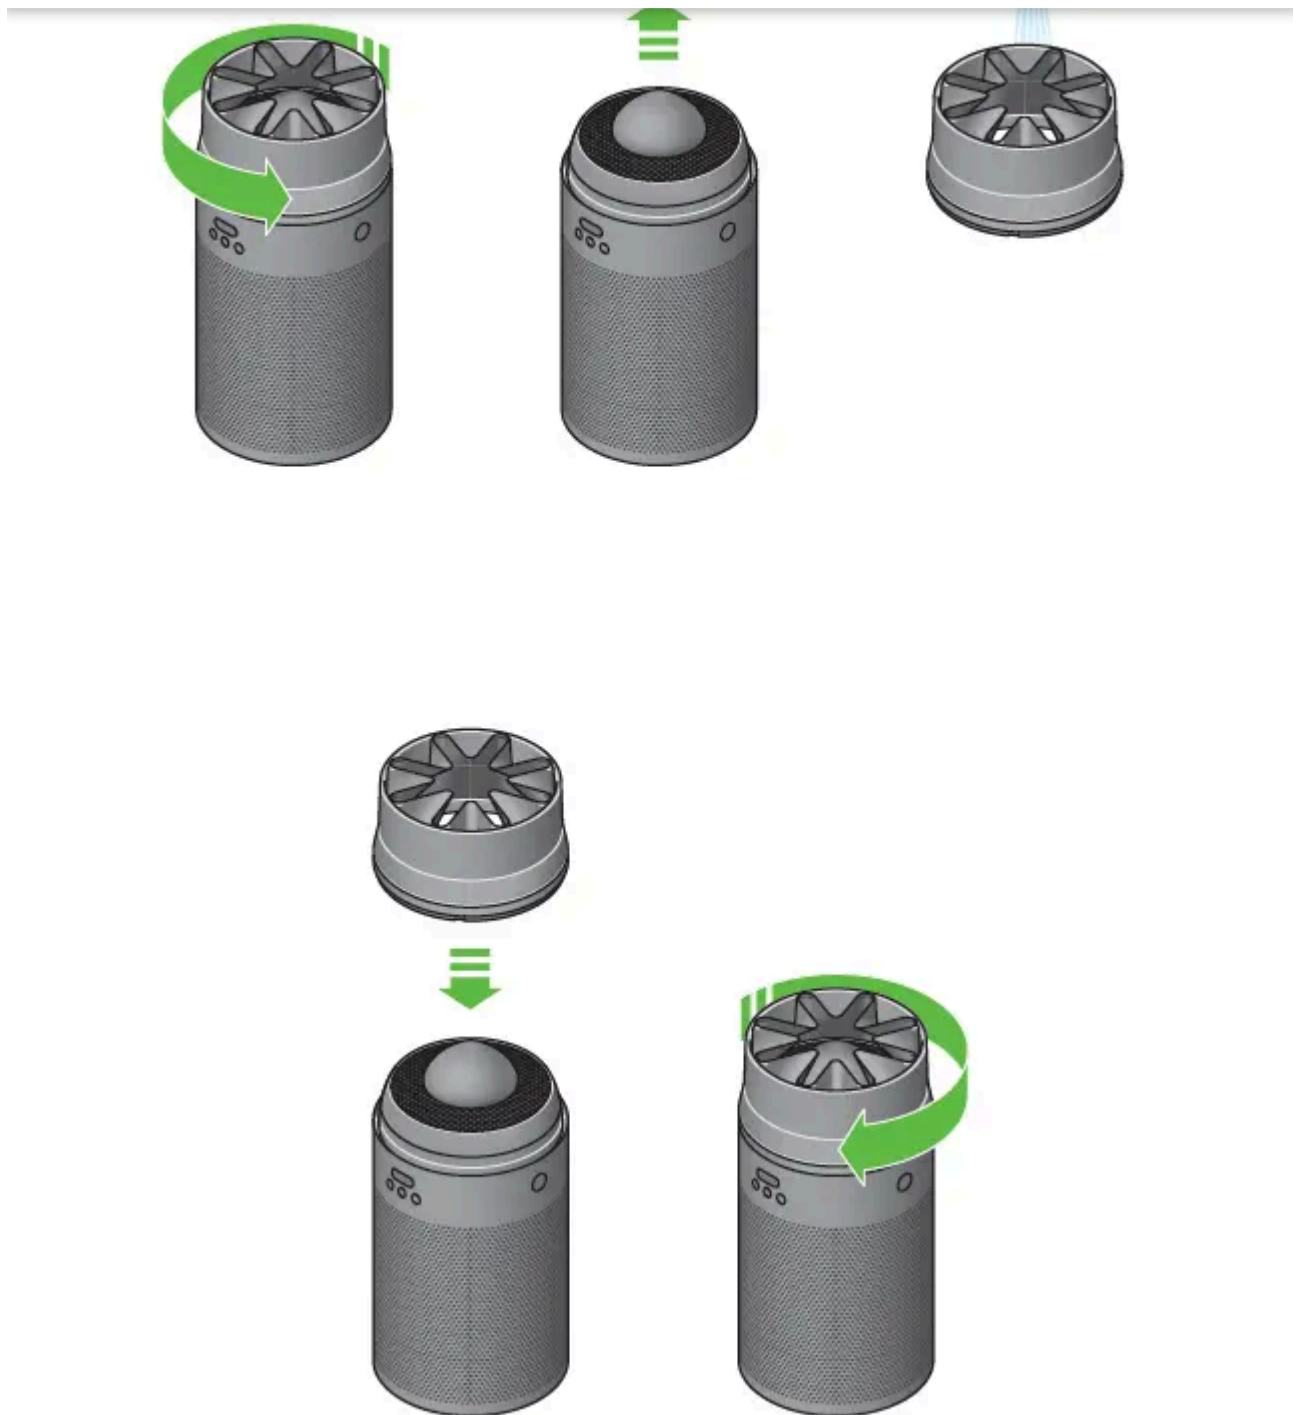

FAQ

Q: How do I change the HEPA filter?




Advertisements



A: Yes, the purifier can still operate without Wi-Fi connectivity, but some features may be limited.

Documents / Resources

	dyson HJ10 Hushjet Compact Purifier [pdf] User Manual HJ10 JN.00000, PN.000000-00-00, HJ10 Hushjet Compact Purifier, HJ10, Hushjet Compact Purifier, Compact Purifier, Purifier
--	---

References

- [User Manual](#)

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.



